


SLZ/SEZ Series

Our super-quiet compact indoor unit, with cutting edge remote control.
Comfortable operation for the living room, bedroom, other home quarters.




Compact Design

Models for any room in the house. For 2×2 ceiling installation, the SLZ compact cassette, for a perfect fit. The concealed ceiling model, the SEZ Series, compresses installation space at only 270mm in height.

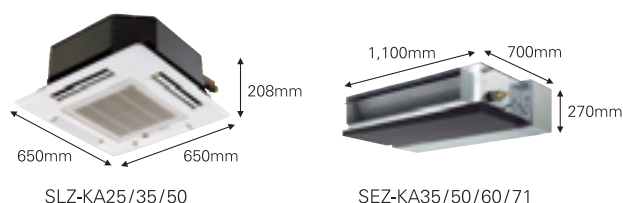

Very Quiet Operation

The S Series, for whisper-quiet operation. Hushed noise level of 28dB (SLZ-KA25VA for cooling). For calm and comfy space. Customize the S Series to your bedrooms or living rooms. You would not recognize the existence of air conditioner.

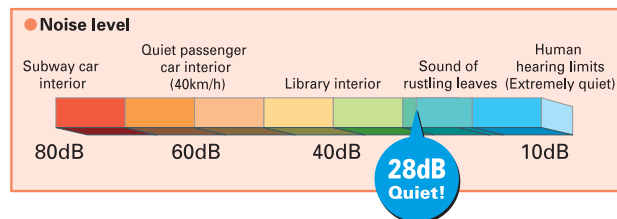

7-Day Programmer

The Mitsubishi Electric new MA remote controller, supporting truly exceptional room comfort. Program the system with this weekly timer, inputting up to 8 patterns for each calendar day.



PAR-21MAA

<New Functions>

- Limiting the set temperature range.
- Auto OFF Timer
- Operation Lock
- Multi-language Display (English, Spanish, Italian, German, French, Russian, Chinese, Japanese)

Energy Saving

Low energy consumption—a must for today's air conditioners. The SLZ/SEZ Series – key to fresh, cost-effective air comfort.

Air-Cleansing Filter



This built-in filter removes dust and contaminants, keeping air fresh all the time. Maintenance is as simple as vacuuming. And more, SLZ Series have a long life filter. It can keep their performance about 2,500 hours without replacement.

SLZ-KA Series

R410A

DC Inverter

HEAT PUMP

Cleaning-free, pipe reuse

Indoor Unit



Remote Controller

Outdoor Unit



SUZ-KA25/35VA



SUZ-KA50VA



4way Cassette Type Specifications

Type		Inverter Heat Pump (R410A)				
Model Name		SLZ-KA25VA	SLZ-KA35VA	SLZ-KA50VA		
Indoor Unit		SLZ-KA25VA(L)*	SLZ-KA35VA(L)*	SLZ-KA50VA(L)*		
Outdoor Unit		SUZ-KA25VA	SUZ-KA35VA	SUZ-KA50VA		
Power Supply [V, Phase, Hz]		230V, Single, 50Hz, Outdoor unit power supply				
Cooling	Capacity [Min. - Rated - Max.]	kW	0.9 - 2.5 - 3.2	1.0 - 3.5 - 3.9	1.1 - 4.6 - 5.2	
	Total Input [Min. - Rated - Max.]	kW	0.25 - 0.69 - 1.00	0.27 - 1.06 - 1.33	0.49 - 1.63 - 2.13	
	EER			3.62	3.30	2.82
		Star Rating		6.0	5.0	3.5
	Running Current [Rated]	A	3.4	4.9	7.4	
	Sound Pressure Level	IN [Lo - Med - Hi]	dB(A)	28 - 31 - 37	29 - 33 - 38	30 - 34 - 39
		OUT (PWL)	dB(A)	46 (59)	47 (60)	53 (68)
Air Volume (IN) [Lo - Mid.- Hi]	I/S	133 - 150 - 167	133 - 150 - 183	133 - 150 - 183		
Heating	Capacity [Min. - Rated - Max.]	kW	0.9 - 3.0 - 4.5	0.9 - 4.0 - 5.0	0.9 - 5.0 - 6.5	
	Total Input [Min. - Rated - Max.]	kW	0.17 - 0.83 - 1.36	0.25 - 1.10 - 1.46	0.39 - 1.55 - 3.36	
	COP			3.61	3.64	3.22
		Star Rating		5.0	5.0	4.0
	Running Current [Rated]	A	4.0	5.1	7.0	
	Sound Pressure Level	IN [Lo - Med - Hi]	dB(A)	28 - 31 - 37	29 - 33 - 38	30 - 34 - 39
		OUT (PWL)	dB(A)	46 (59)	48 (61)	55 (68)
Air Volume (IN) [Lo - Mid.- Hi]	I/S	133 - 150 - 167	133 - 150 - 183	133 - 150 - 183		
Starting Current	A	3.65	4.75	6.75		
Max. Running Current	A	8.16	9.18	16		
Indoor	Input [Rated]	W	75	85	85	
	Dimensions [H x W x D]	mm	208 x 570 x 570	208 x 570 x 570	208 x 570 x 570	
		Panel	mm	20 x 650 x 650	20 x 650 x 650	20 x 650 x 650
Weight (Panel)	kg	16.5 (3)	16.5 (3)	16.5 (3)		
Outdoor	Dimensions [H x W x D]	mm	550 x 800 x 285	550 x 800 x 285	850 x 840 x 330	
	Weight	kg	33	37	53	
	Breaker Size	A	10	10	20	
Ext. Piping	Diameter (Gas / Liquid)	mm	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35	
	Max. Length / Height	m	20 / 12	20 / 12	30 / 15	
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ 46	-10 ~ 46	-10 ~ 43	
	Heating	°C	-10 ~ 24	-10 ~ 24	-10 ~ 24	

* SLZ-KA VAL is with a wireless remote controller.

R410A

DC Inverter

SEZ-KA Series

HEAT PUMP

Cleaning-free, pipe reuse

Indoor Unit



Outdoor Unit



SUZ-KA35VA



SUZ-KA50/60/71VA

- DC Inverter
- PAM Control
- Air-Cleaning
No replacement necessary - cleans every 100h operation
- 270mm Compact
- ACO
- Auto Restart
- Cooling at 46°C/-10°C
- Cooling at -10°C
- Heating at -10°C
- Weekly Timer
- Centralized On/Off
Optional
- M-NET connection
Optional
- Self Diagnosis
check code
- 12m 20m
KASS
- 15m 30m
KAS0/60/71
- MXZ connection
- Flare connection

Remote Controller



Ceiling Concealed Type Specifications

Type		Inverter Heat Pump (R410A)					
Model Name		SEZ-KA35VA	SEZ-KA50VA	SEZ-KA60VA	SEZ-KA71VA		
Indoor Unit		SEZ-KA35VA	SEZ-KA50VA	SEZ-KA60VA	SEZ-KA71VA		
Outdoor Unit		SUZ-KA35VA	SUZ-KA50VA	SUZ-KA60VA	SUZ-KA71VA		
Power Supply [V, Phase, Hz]		230V, Single, 50Hz, Outdoor unit power supply					
Cooling	Capacity [Min. - Rated - Max.]	kW	1.0 - 3.5 - 3.9	1.1 - 5.0 - 5.6	1.1 - 5.5 - 6.3	0.9 - 7.1 - 8.3	
	Total Input [Min. - Rated - Max.]	kW	0.85 - 1.06 - 1.31	1.42 - 1.78 - 2.21	1.6 - 1.96 - 2.43	0.82 - 2.46 - 3.52	
	EER		3.30	2.81	2.81	2.89	
	Running Current [Rated]	A	4.9	8.0	9.0	10.9	
	Sound Pressure Level	IN [Lo - Hi]	dB(A)	30 - 35	31 - 39	32 - 43	32 - 43
		OUT (PWL)	dB(A)	47 (60)	53 (68)	53 (68)	53 (68)
Air Volume (IN) [Lo - Hi]	I/S	167 - 217	200 - 283	200 - 333	200 - 333		
Heating	Capacity [Min. - Rated - Max.]	kW	0.9 - 4.0 - 5.0	1.1 - 5.9 - 7.2	0.9 - 6.9 - 8.0	0.9 - 8.1 - 10.4	
	Total Input [Min. - Rated - Max.]	kW	0.72 - 1.10 - 1.27	1.20 - 1.84 - 2.12	1.59 - 2.45 - 2.82	0.74 - 2.36 - 3.84	
	COP		3.64	3.21	2.82	3.43	
	Running Current [Rated]	A	5.2	8.5	10.4	10.5	
	Sound Pressure Level	IN [Lo - Hi]	dB(A)	30 - 35	31 - 39	32 - 43	32 - 43
		OUT (PWL)	dB(A)	48 (61)	55 (68)	55 (68)	55 (68)
Air Volume (IN) [Lo - Hi]	I/S	167 - 217	200 - 283	200 - 333	200 - 333		
Starting Current	A	4.75	6.75	9.75	10.30		
Max. Running Current	A	9.18	16	16	16		
Indoor	Input [Rated]	W	60	80	100	130	
	Dimensions [H x W x D]	mm	270 x 1,100 x 700	270 x 1,100 x 700	270 x 1,100 x 700	270 x 1,100 x 700	
	Weight	kg	33.5	33.5	33.5	35	
	Static Pressure	Pa	Std:30, Max:50	Std:30, Max:50	Std:30, Max:50	Std:30, Max:50	
Outdoor	Dimensions [H x W x D]	mm	550 x 800 x 285	850 x 840 x 330	850 x 840 x 330	850 x 840 x 330	
	Weight	kg	37	53	53	58	
	Breaker Size	A	10	20	20	20	
Ext. Piping	Diameter (Gas / Liquid)	mm	9.52 / 6.35	12.7 / 6.35	15.88 / 6.35	15.88 / 9.52	
	Max. Length / Height	m	20 / 12		30 / 15		
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ 46	-10 ~ 43	-10 ~ 43	-10 ~ 43	
	Heating	°C			-10 ~ 24		